



JTGL-600 Glass CNC Machining Center

Product descriptions and features

Features

- Full protective hood, all-in-one structure
- Natural granite machine bed, excellent material characteristics, precision retainability and vibration absorption
- CCD visual positioning system (optional)

For Material

Glass, non-metal oxide microchip

Applied Range

Screen glass of consumer electronics



KEJIE website



KEJIE wechat

Parameters

Item	Parameter
Working area X/Y/Z	600/400/120mm
Work table size	600×400mm
Max load of table	100kg
Spindle power Max spindle speed	1.2kw/60000rpm or 2.5kw/40000rpm
Rapid traverse rate	10m/min
Cutting feed rate	10m/min
Positioning accuracy	0.008mm
Repeatability	0.005mm
Weight	2500kg
Machine dimension	1300×1500×1600mm
Power supply	3-PH AC380V ±5% 50Hz


Standard Accessories

- High speed CNC controller
- High speed spindle
- AC servo motor
- Precision ball screw and guide rail
- Tool setting sensor
- Hand Wheel
- Spindle cooling system


Optional Accessories

- Automatic tool changer
- CCD positioning system
- Voltage stabilizer
- Oil mist collector
- Probe

Machine dimension

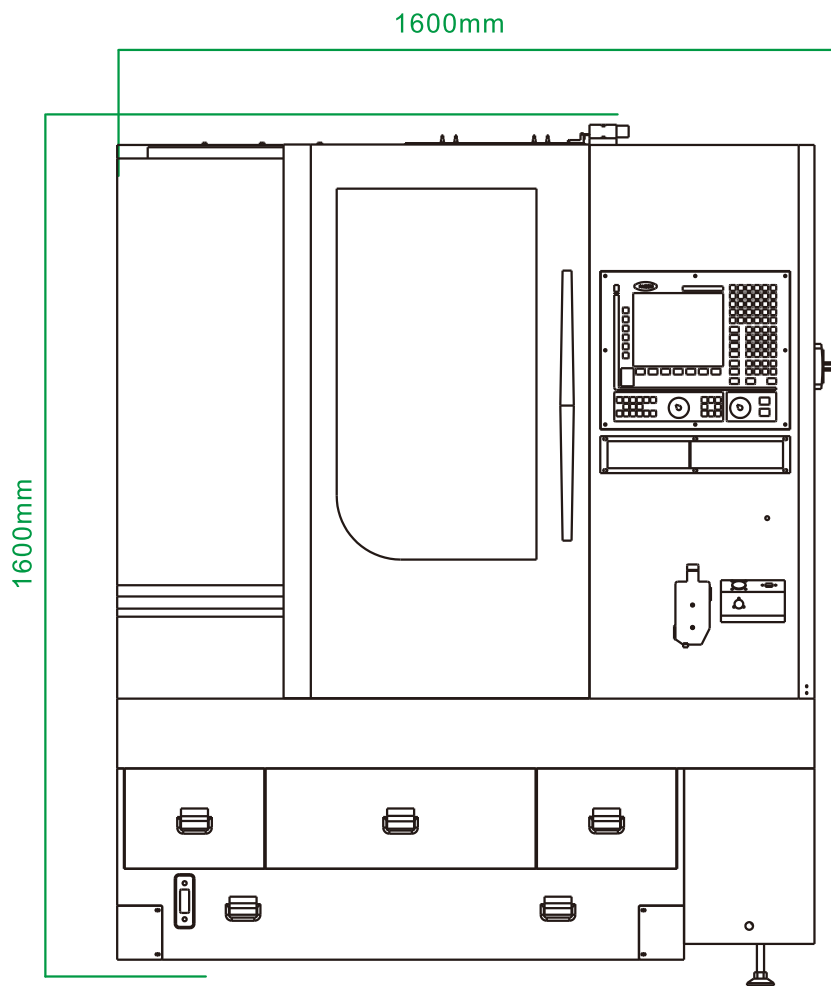

Front

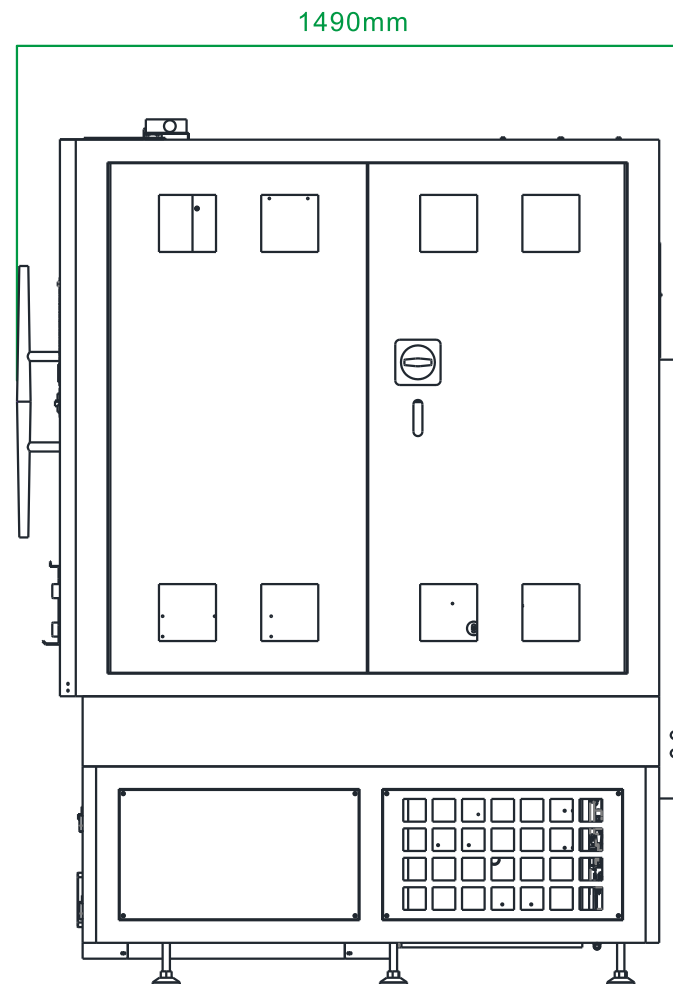

Left